


## MICRO-OHM METER PE-14R

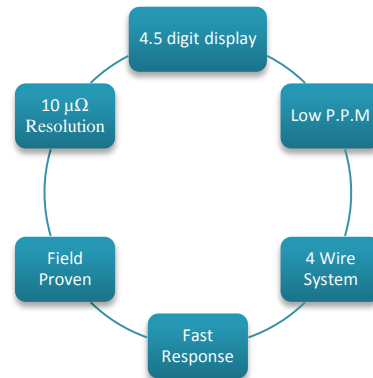

### GENERAL SPECIFICATION-:

DISPLAY -: 12.5mm LED

- POWER-:230V ± 15%, 50/60 Hz

OPERATING TEMP-: 5° TO 45° C

- TEMP COEFFICIENT -: 50 P.P.M

### ELECTRICAL SPECIFICATION-:

**ACCURACY-:** 0.05% of reading ± 0.03 % of range

RANGE	RESOLUTION	TEST CURRENT
199.99mΩ	10 μΩ	1A
1.9999Ω	100 μΩ	1A
19.999Ω	1 mΩ	0.1 A
199.99Ω	10 mΩ	10mA
1.9999KΩ	100 mΩ	1 mA
19.999KΩ	1 Ω	0.1 mA
199.99KΩ	10 Ω	0.01mA

#### ACCESSORIES-:

- 1m probe along with crocodile clips
- Instruction manual
- Mains cord

#### OPTIONAL ACCESSORIES-:

- Gold plated Kelvin Clips
- One meter stand
- Standard shunts (0.5mΩ to 100 Ω)