


## MICRO-OHM METER PE-15R/PE-15RC

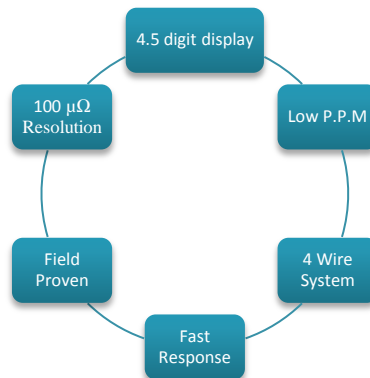

### GENERAL SPECIFICATION:-

DISPLAY -: 12.5mm LED

- POWER:-230V ± 15%, 50/60 Hz

OPERATING TEMP:- 5° TO 45° C

- TEMP COEFFICIENT -: 50 P.P.M

### APPLICATIONS:-

- RESISTOR INDUSTRY (SPECIFICALLY FOR CARBON FILM / METAL FILM RESISTORS)

### ELECTRICAL SPECIFICATION:-

**ACCURACY**:- 0.05% of reading ± 0.03 % of range except 0.05% of reading ± 0.05% of range for 19.999mΩ

RANGE	RESOLUTION	TEST CURRENT
199.99mΩ	10 μΩ	1A
1.9999Ω	100 μΩ	1A
19.999Ω	1 mΩ	0.1 A
199.99Ω	10 mΩ	10mA
1.9999KΩ	100 mΩ	1 mA
19.999KΩ	1 Ω	0.1 mA
199.99KΩ	10 Ω	0.01mA



### ACCESSORIES:-

- 1m probe along with crocodile clips
- Instruction manual
- Mains chord
- Kelvin & Battery Clips(Optional)

**NOTE** -: MODEL PE-15RC IS ALONG WITH RS-232 FACILITY WITH ALL TECHNICAL SPECIFICATION REMAINING SAME

### PRESTIGE ELECTRONICS

ADDRESS:- 5/265,ASHIRWAD INDL ESTATE,RAM MANDIR ROAD,GOREGAON(W),MUMBAI – 400104

TEL/FAX:- 02226763840 / 02226763911

EMAIL:-sales@prestigeelectronics.com