


MICRO-OHM METER PE-11R/PE-11RC

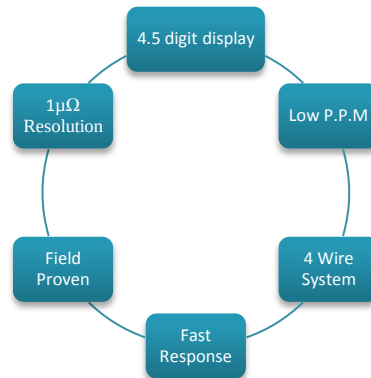

GENERAL SPECIFICATION:-

DISPLAY -: 12.5mm LED

- POWER:-230V+- 15%, 50/60 Hz

OPERATING TEMP:- 5° TO 45° C

- TEMP COEFFICIENT -: 50 P.P.M

APPLICATIONS:-

- CABLES & WIRES
- CONDUCTORS
- MOTORS
- TRANSFORMERS(CT'S & PT'S)
- CONTACTORS

ELECTRICAL SPECIFICATION:-

ACCURACY:- 0.05% of reading $\pm$ 0.03 % of range except 0.05% of reading $\pm$ 0.05% of range for 19.999mΩ

RANGE	RESOLUTION	TEST CURRENT
19.999mΩ	1 $\mu\Omega$	1 A
199.99mΩ	10 $\mu\Omega$	1A
1.9999Ω	100 $\mu\Omega$	0.1 A
19.999Ω	1 mΩ	10mA
199.99Ω	10 mΩ	1 mA
1.9999KΩ	100 mΩ	0.1 mA
19.999KΩ	1 Ω	0.01mA



ACCESSORIES:-

- 1m probe along with crocodile clips
- Instruction manual
- Mains chord
- Kelvin & Battery Clips(Optional)

NOTE -: MODEL PE-11RC IS ALONG WITH RS-232 FACILITY WITH ALL TECHNICAL SPECIFICATION REMAINING SAME

PRESTIGE ELECTRONICS

ADDRESS:- 5/265,ASHIRWAD INDL ESTATE,RAM MANDIR ROAD,GOREGAON(W),MUMBAI – 400104

TEL/FAX:- 02226763840 / 02226763911

EMAIL:-sales@prestigeelectronics.com

