


MICRO-OHM METER PE-14R/PE-14RC

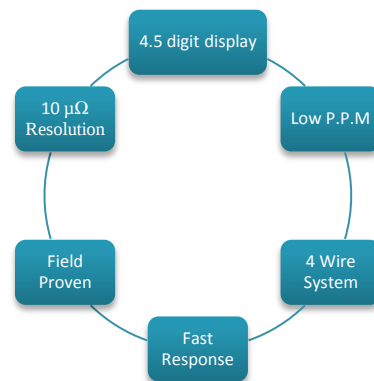

GENERAL SPECIFICATION:-

DISPLAY -: 12.5mm LED

- POWER:-230V $\pm$ 15%, 50/60 Hz

OPERATING TEMP:- 5° TO 45° C

- TEMP COEFFICIENT -: 50 P.P.M

APPLICATIONS:-

- RESISTOR INDUSTRY
(SPECIFICALLY FOR WIRE
WOUND RESISTORS)

ELECTRICAL SPECIFICATION:-

ACCURACY:- 0.05% of reading $\pm$ 0.03 % of range except 0.05% of reading $\pm$ 0.05% of range for 19.999m Ω

RANGE	RESOLUTION	TEST CURRENT
199.99m Ω	10 $\mu\Omega$	1A
1.9999 Ω	100 $\mu\Omega$	1A
19.999 Ω	1 m Ω	0.1 A
199.99 Ω	10 m Ω	10mA
1.9999K Ω	100 m Ω	1 mA
19.999K Ω	1 Ω	0.1 mA
199.99K Ω	10 Ω	0.01mA



ACCESSORIES:-

- 1m probe along with crocodile clips
- Instruction manual
- Mains chord
- Kelvin & Battery Clips(Optional)

NOTE -: MODEL PE-14RC IS ALONG WITH RS-232 FACILITY WITH ALL TECHNICAL SPECIFICATION REMAINING SAME

PRESTIGE ELECTRONICS

ADDRESS:- 5/265,ASHIRWAD INDL ESTATE,RAM MANDIR ROAD,GOREGAON(W),MUMBAI – 400104

TEL/FAX:- 02226763840 / 02226763911

EMAIL:-sales@prestigeelectronics.com

