
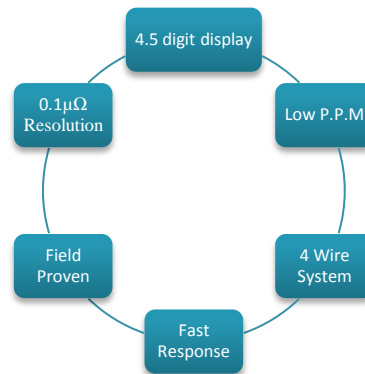


MICRO-OHM METER PE-16R/PE-16RC

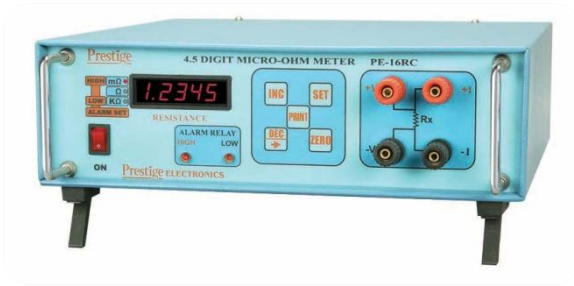

GENERAL SPECIFICATION:-

DISPLAY -: 12.5mm LED

- POWER:-230V ± 15%, 50/60 Hz

OPERATING TEMP:- 5° TO 45° C

- TEMP COEFFICIENT -: 50 P.P.M

APPLICATIONS:-

- CABLES & WIRES
- CONDUCTORS
- MOTORS
- TRANSFORMERS (CT'S & PT'S)
- CONTACTORS

ELECTRICAL SPECIFICATION:-

ACCURACY:- 0.05% of reading ± 0.03 % of range except 0.05% of reading ± 0.05% of range for 19.999mΩ

RANGE	RESOLUTION	TEST CURRENT
1.9999mΩ	0.1 μΩ	10 A
19.999mΩ	1 μΩ	1A
199.99mΩ	10 μΩ	1 A
1.9999Ω	100 μΩ	0.1A
19.999Ω	1 mΩ	10 mA
199.99Ω	10 mΩ	1 mA
1.9999KΩ	100 mΩ	0.1mA



ACCESSORIES:-

- 1m probe along with crocodile clips
- Instruction manual
- Mains chord
- Kelvin & Battery Clips(Optional)

NOTE :- MODEL PE-16RC IS ALONG WITH RS-232 FACILITY WITH ALL TECHNICAL SPECIFICATION REMAINING SAME.

PRESTIGE ELECTRONICS

ADDRESS:- 5/265,ASHIRWAD INDL ESTATE,RAM MANDIR ROAD,GOREGAON(W),MUMBAI – 400104

TEL/FAX:- 02226763840 / 02226763911

EMAIL:- sales@prestigeelectronics.com