


MICRO-OHM METER PE-20R

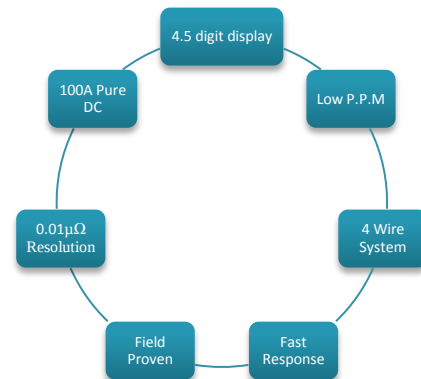

GENERAL SPECIFICATION-:

DISPLAY -: 12.5mm LED

- POWER:-230V $\pm$ 15%, 50/60 Hz

OPERATING TEMP-: 5° TO 45° C

- TEMP COEFFICIENT -: 50 P.P.M

DUTY CYCLE -: 2 mins (100A) / 4 mins (50A) ON
6 mins OFF

APPLICATIONS-:

FOR MEASURING VERY LOW RESISTANCE OF -:

- CIRCUIT BREAKERS
- ISOLATORS
- SHUNTS
- BUSBARS
- CABLES
- JOINTS
- METALLURGICAL TESTING

ELECTRICAL SPECIFICATION-:

ACCURACY-: 0.07% of range $\pm$ 0.1% of reading.

RANGE	RESOLUTION	TEST CURRENT
199.99 $\mu\Omega$	0.01 $\mu\Omega$	100 A.DC
1999.9 $\mu\Omega$	0.1 $\mu\Omega$	100A / 50 A.DC
19.999 m Ω	1 $\mu\Omega$	10A / 1A.DC
199.99 m Ω	10 $\mu\Omega$	1 A.DC
1999.9 m Ω	100 $\mu\Omega$	0.1 A.DC



ACCESSORIES -:

- 12m LONG PROBE SET ALONG WITH 100A CROCODILE , BATTERY CLIPS , C - CLAMPS
- INSTRUCTION MANUAL
- MAINS CORD
- CARRYING CASE WITH TROLLEY

Prestige ELECTRONICS

ADDRESS:- 5/265,ASHIRWAD INDL ESTATE, RAM MANDIR ROAD,GOREGAON(W),MUMBAI – 400104

TEL/FAX:- 02226763840 / 02226763911

EMAIL:-sales@prestigeelectronics.com

WEBSITE :- www.prestigeelectronics.com

response@prestigeelectronics.com

PRODUCTS MADE TO PERFECTION
WE ARE CONDUCTIVE TO RESISTIVE MEASUREMENT