


MICRO-OHM METER PE-12R

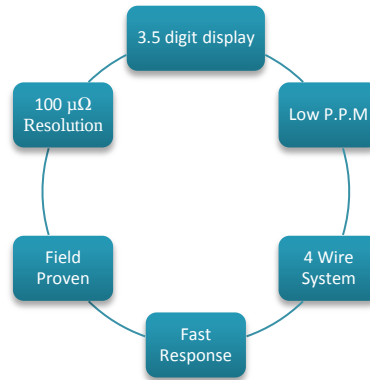

GENERAL SPECIFICATION:-

DISPLAY -: 12.5mm LED

- POWER:-230V $\pm$ 15%, 50/60 Hz

OPERATING TEMP:- 5° TO 45° C

- TEMP COEFFICIENT -: 50 P.P.M

APPLICATIONS:-

- CABLES & WIRES
- CONDUCTORS
- MOTORS
- TRANSFORMERS(CT'S & PT'S)
- CONTACTORS

ELECTRICAL SPECIFICATION:-

ACCURACY:- 0.1% of range $\pm$ 0.1% of reading

RANGE	RESOLUTION	TEST CURRENT
199.9 mΩ	0.1 mΩ	1 A
1.999 Ω	1 mΩ	1A
19.99 Ω	10 mΩ	0.1 A
199.9 Ω	100 mΩ	10mA
1.999 KΩ	1 Ω	1 mA
19.99 KΩ	10 Ω	0.1 mA
199.9 KΩ	100 Ω	0.01mA



ACCESSORIES:-

- 1m probe along with crocodile clips
- Instruction manual
- Mains chord
- Kelvin & Battery Clips(Optional)

PRESTIGE ELECTRONICS

ADDRESS:- 5/265,ASHIRWAD INDL ESTATE,RAM MANDIR ROAD,GOREGAON(W),MUMBAI – 400104

TEL/FAX:- 02226763840 / 02226763911

EMAIL:- sales@prestigeelectronics.com